
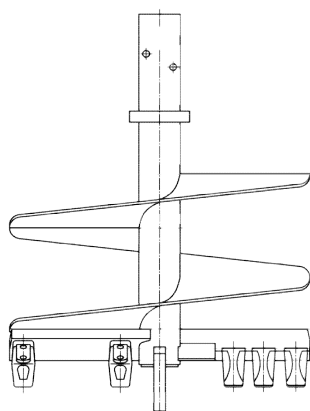



利根 “GT-750” 钻机

地基搅拌加固

- 大给进,高扭矩;外观设计美观轻巧,适合窄小地方施工
- 液压补偿型回路系统,保证给进速度一定
- 每分钟 100 次的高速旋转,保证良好的搅拌效果

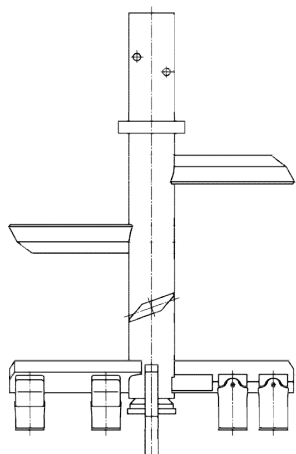

Counter weight (option)

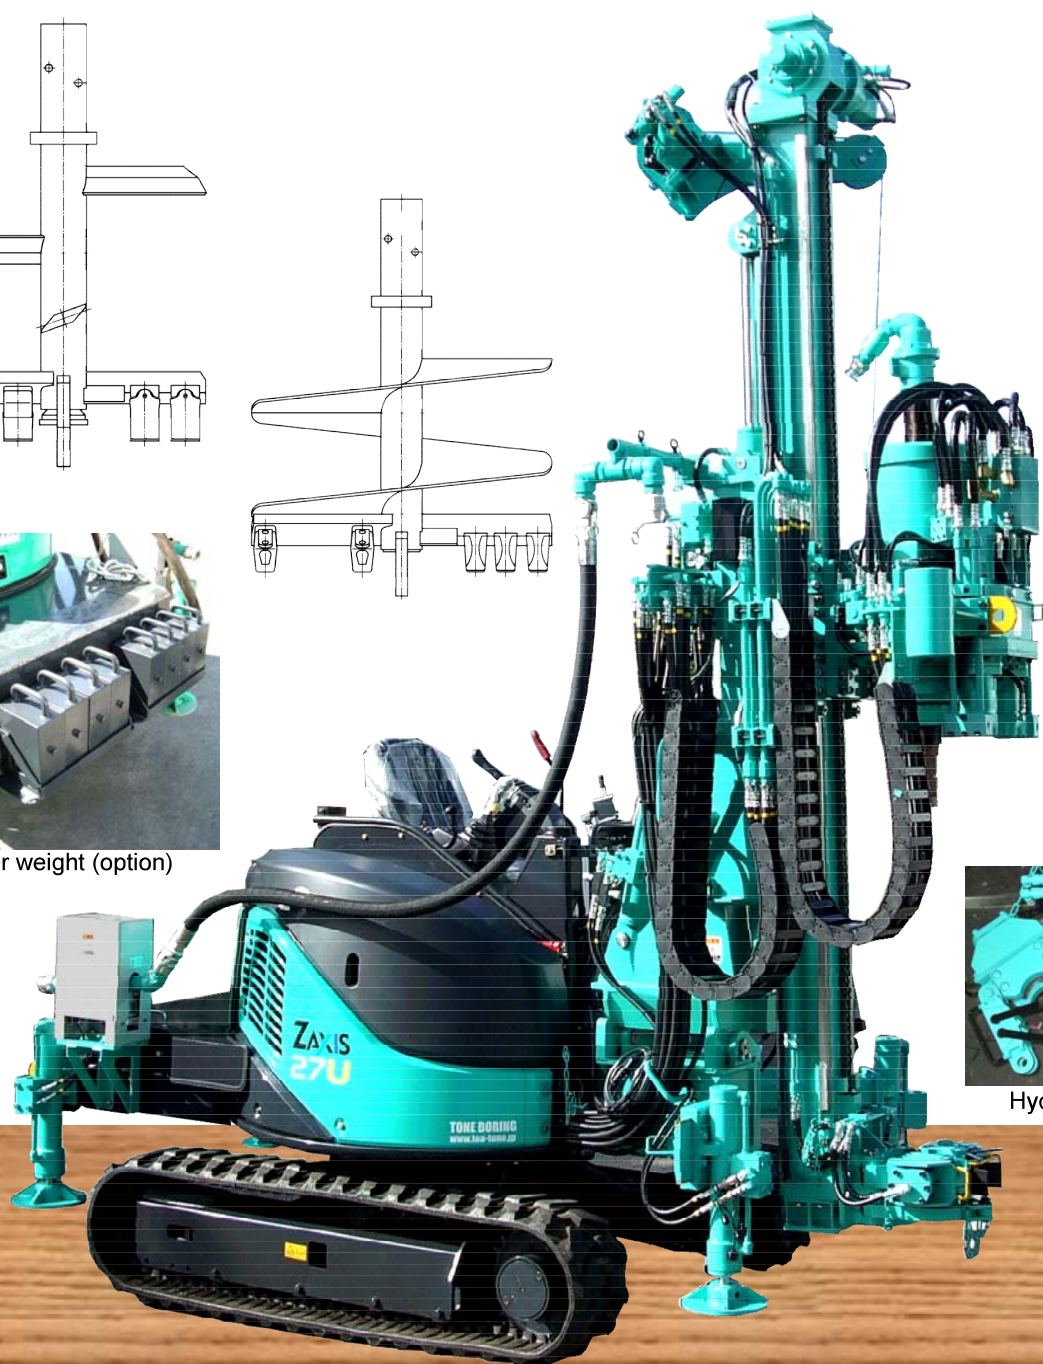

Hydraulic rod clamp





株式会社东亚利根钻机

ULR: <http://www.toa-tone.jp>

GT-750 图纸与参数

PHOTO:
用吊车将钻机安置到施
工现场

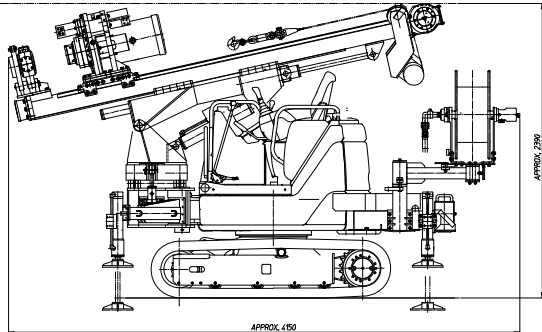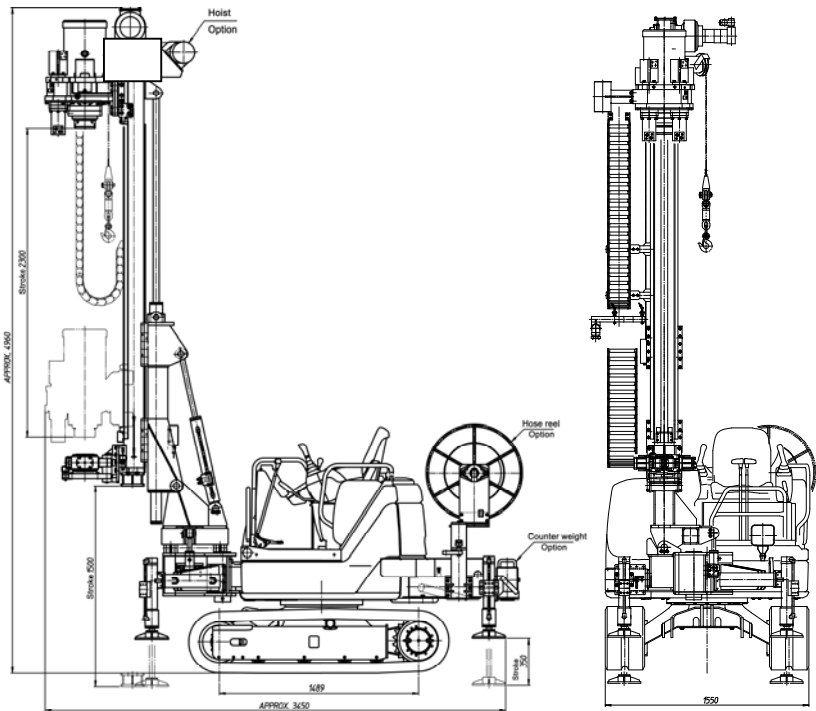

Remarks: GT-750 with optional items

钻机特征

- 最大扭矩 7,350 N-m
- 主机可以是 0.08 m³ 小型挖土机,轻巧灵活
- 地面凹凸不平也可以安定行走。

主要参数

加固直径	600 mm		桅杆	Slide stroke	1,500 mm
动力头	主轴直径	92 mm		Swing angle	5 degree to right & left
	扭矩	Low: 7,350 N-m	履带主机	Engine model	YANMAR "EDM-3TNV88"
		2 nd : 3,670 N-m		Rated out put	19.7 kW/2,200 min ⁻¹
		Top: 1,830 N-m		Fuel tank capacity	40 liter
	转速	Low: 0 - 25 min ⁻¹	重量	Approx. 4 ton without options	
		2 nd : 0 - 50 min ⁻¹	自选		
		Top: 0 - 100 min ⁻¹	卷扬机	Type	Hydraulic motor drive
给进系统	型号	Hydraulic motor drive with chain		Pulling capacity	1,962 N
	给进/提升力	24.5 kN		Rope size	6 mm
	行程	2,300 mm	管理系统		
	给进所以	0 - 4 m/min. with quick feed	前方排土板		
液压把手	型号	Spring chuck	辅助卷扬机		
	钻杆直径	88.9 mm pin joint	本机吊起治具		

In accordance with our policy of constant improvement, we reserve the right to amend design, materials, specifications and prices at any time without prior notice.