


TOP-750 TOP DRIVE TRUCK MOUNTED WATER WELL DRILL RIG

DOWN-THE-HOLE HAMMER, DIRECT AIR/MUD ROTARY
REVERSE CIRCULATION FOR 300 TO 600 M DEPTH



TOA-TONE BORING CO., LTD.

TOP-750 TRUCK MOUNTED WATER WELL DRILL RIG for 300 – 600 m depth



RATED CAPACITY

Drill pipe size	Recommended depth
3-1/2"(89mm)	500 – 600 m
4-3/4"(120mm)	300 – 400 m

ROTARY HEAD

Hydraulically driven heavy duty power swivel with retract-back system in the mast.

Rotation speed:	Low: 0 -50 min ⁻¹ High: 0 -100 min ⁻¹
Max. torque:	7.840 kN-m
Max. load capacity:	137.2 kN

HOLD BACK/PULL DOWN

Hold back and pull down system is functioned by twin hydraulic cylinder with chain located at outside of the mast frame.

Max. hold back:	137.2 kN
Max. pull down:	49 kN
Feed stroke length:	7.5 m

DRWAWORKS

Hydraulically driven, with free-falling mechanism for quick lowering drill strings.

Max. single line pull:	58.8 kN
Line speed:	Low: 0-23 m/min. High: 0-45 m/min.
Spooling capacity:	100 m with 16 mm cable

SAND REEL

Hydraulically driven, with free-falling mechanism for quick lowering.

Max. single line pull:	29.4 kN
Line speed:	Low: 0-40 m/min. High: 0-80 m/min.
Spooling capacity:	800 m with 9 mm cable

MAST

Electrically welded rigid structural section, raised and lowered by twin hydraulic cylinder, with enough space for retract back of rotary head.

Height:	Approx. 12.3 m from ground level
Gross capacity:	490 kN
Hook load capacity:	235.2 kN

MUD PUMP

Duplex reciprocating piston pump, Model NAS-7	
Max. discharge volume:	1500 lit/min.
Max. pressure:	1.96 MPa

LEVELING JACKS

Individually controlled hydraulic jacks, each two at front and rear installed under rig common base, fully equipped with safety devices. All jacks are enclosed in housing to prevent piston rod from damage.

BREAKOUT SYSTEM

Hydraulically actuated pipe breakout system is equipped with breakout tong for easy disconnection of tool joints.

CONTROLS

All controls and gauges required for drilling and rig operation are grouped at and fitted at driller's operation panel.

FOAM INJECTION PUMP

Hydraulically driven piston pump for DTH hammer drilling.

Max. discharge volume:	30 liter/min.
Max. pressure:	1.96 MPa

TRUCK

Type:	6x4 or 6x6 diesel truck
GWM:	Min. 25,000 kg

POWER SOURCE


Truck engine PTO or independent diesel power unit to drive hydraulic pumps, mud pump, etc.
Power requirement: 210 PS

LIGHTING

Floodlight arrangement for night operation fitted on the mast.

OPTIONAL EQUIPMENT

Air compressor for reverse circulation

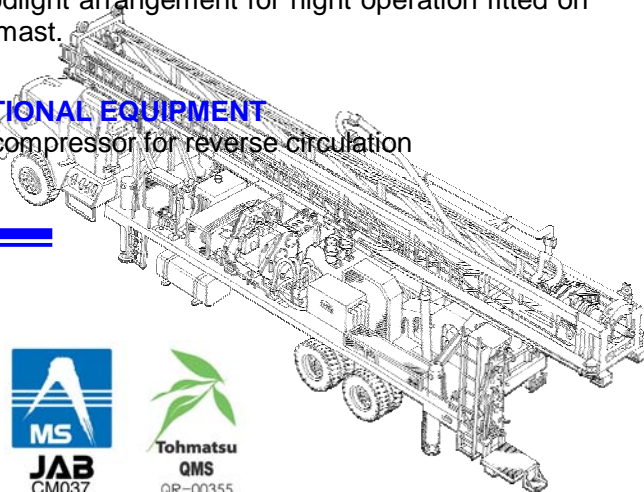

TOA-TONE BORING CO., LTD.

3-7 Roppongi 7-chome, Minato-ku, Tokyo 106-0032, Japan

Phone: 03-5775-3921 Fax: 03-5775-3967

ULR: <http://www.toa-tone.jp>

