


利根反循环顶驱小型灌注桩钻机



TONE

TOP DRIVE TYPE REVERSE CIRCULATION DRILL

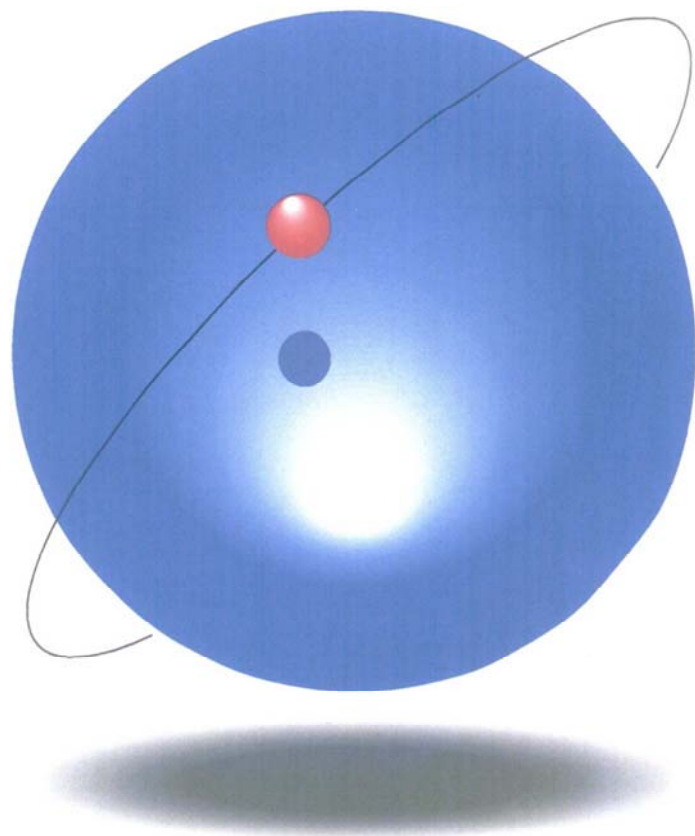

TOP DRIVE REVERSE CIRCULATION DRILL

TBH

株式会社 东亚利根钻机

反循环 高品质

TBH钻机是利根的经典反循环灌注桩钻机。
这次，利根又开发了可以遥控施工和履带
式钻机。




步履式

PHOTO: TBH-8



履带底盘

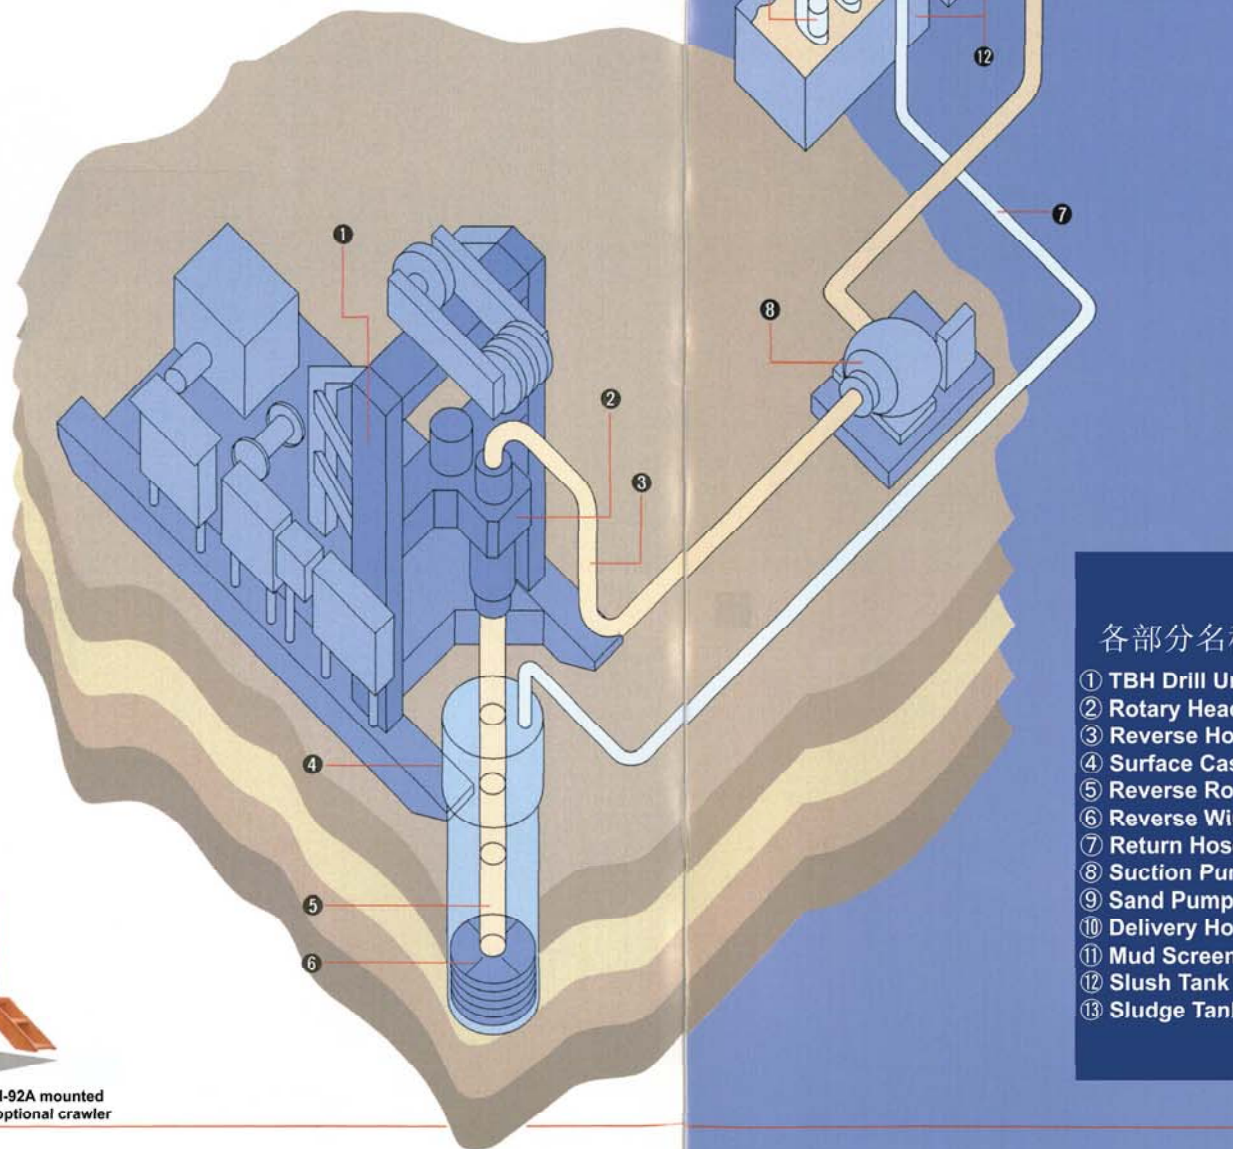PHOTO: TBH-92A mounted
on optional crawler


各部分名称

- ① TBH Drill Unit
- ② Rotary Head
- ③ Reverse Hose
- ④ Surface Casing
- ⑤ Reverse Rod
- ⑥ Reverse Wing Bit
- ⑦ Return Hose
- ⑧ Suction Pump
- ⑨ Sand Pump
- ⑩ Delivery Hose
- ⑪ Mud Screen
- ⑫ Slush Tank
- ⑬ Sludge Tank



TBH-8 反循环钻机

外形尺寸

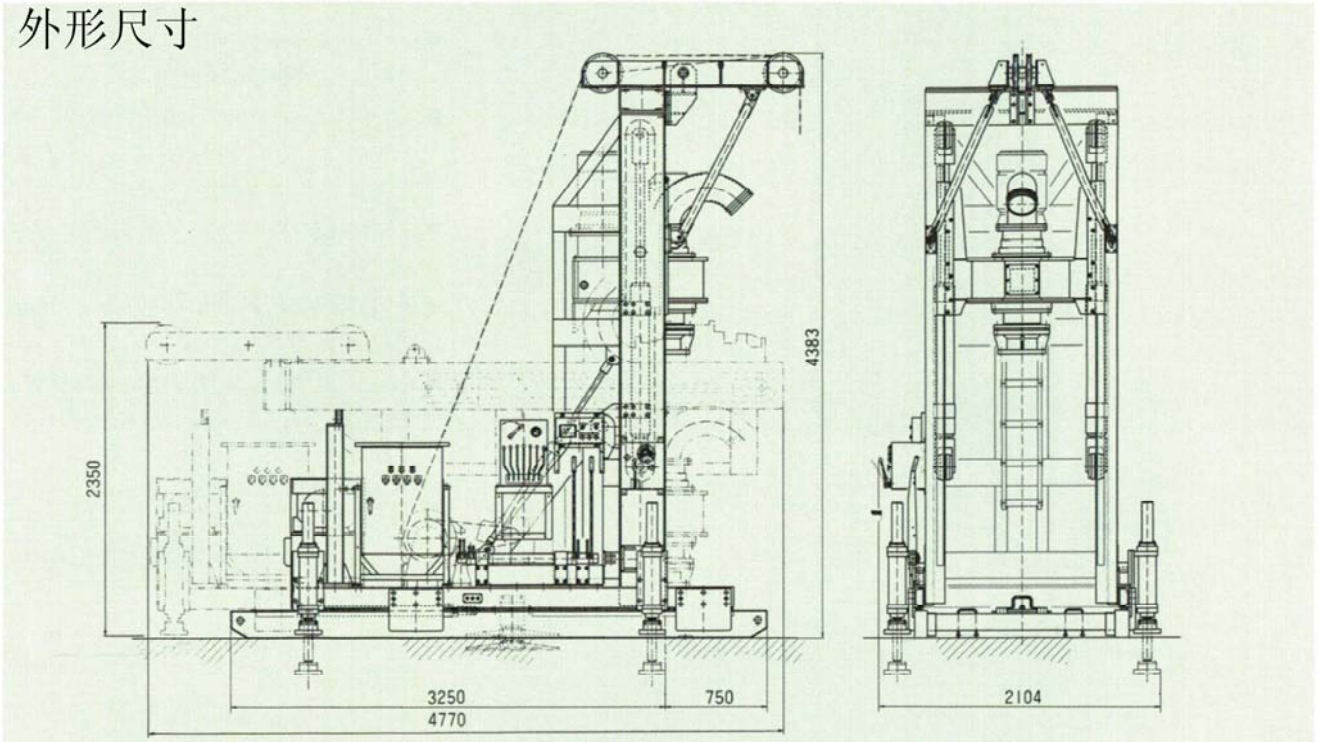

技术参数

钻孔能力
Depth: 50 m with suction pump
Hole diam.: 800 - 1500 mm

动力
Swivel head: 15 kW/6P
Hoist: 11 kW/4P
Hydraulic unit: 15 kW/4P

水龙头
Type: Top head electric drive
Rotating speed: Low; 7.5 rpm.
High; 20 rpm.
Torque: Low; 17.6 kN-m
High; 6.3 kN-m

Spindle I.D.: 200 mm
Type of rod joint: 200 mm flange

重量
Approx. 7,000 kg

给进系统
Type: Hydraulic cylinder,
dual feed chain drive
Max. feed: 10,000 kg
Max. balance: 10,000 kg
Feed stroke: 1,750 mm

卷扬机
Type: Planetary gear, band brake
Single line pull: 2,200 kg
Spooling capacity: 85 m with 12.5 mm wire rope

桅杆
Type: Hydraulic raised and lowered

底盘
Type: Skid base with hydraulic slide
base
Slide stroke: 1,000 mm

自选
Slef-traveling device
Air-lifting swivel



株式会社 东亚利根钻机

Head Office: 3-7 Roppongi 7-chome, Minato-ku, Tokyo 106-8552, Japan

Phone: 03-5775-3939 **Fax:** 03-5775-3967

Factory: 1900-1 Mikkaichiba, Enzan, Koushu City 404-0047, Yamanashi Pref., Japan

Phone: 0553-20-2600 **Fax:** 0553-20-2660

Kantou Branch: 03-5662-3521

Sapporo Branch: 011-666-2131

Kanazawa Branch: 076-260-1434

Fukuoka Branch: 092-935-3969

Kansai Branch: 06-6649-0097

Touhoku Branch: 022-366-6260

Okayama Branch: 086-296-8566

URL: <http://www/toa-tone.jp>